


These flow characteristics are based on water with a temperature of 5-30 °C.

They are valid for HERA® BD in open position.

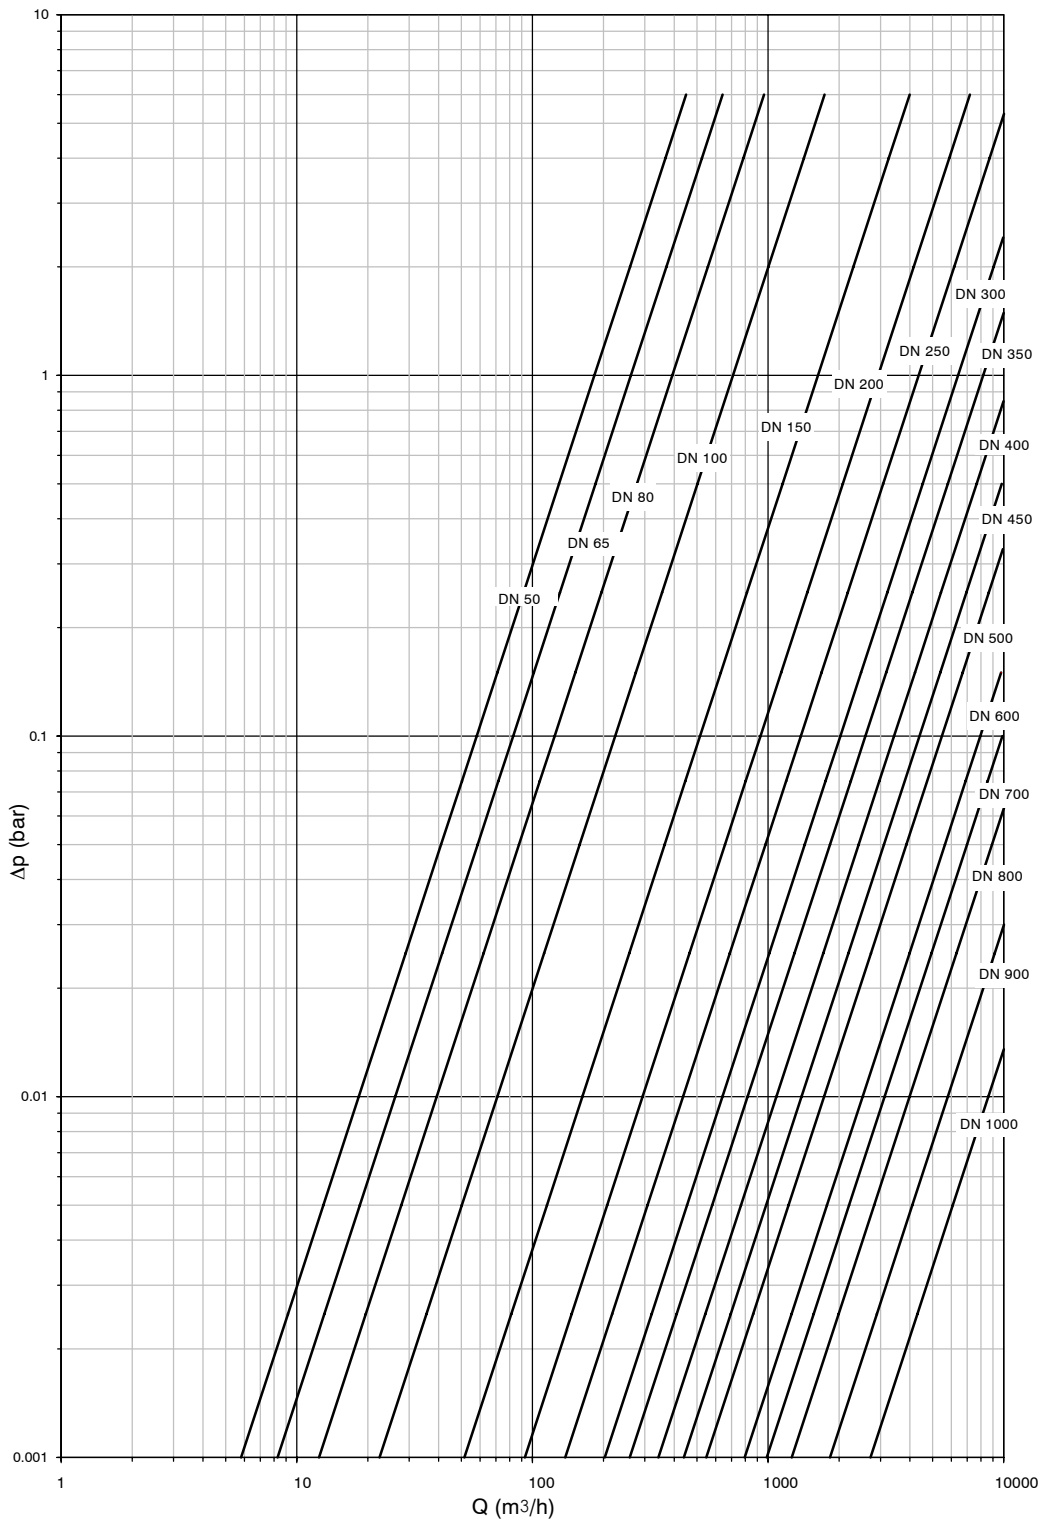

DN	Kv (m³/h)
50	245
65	350
80	525
100	948
125	1495
150	2176
200	3923
250	5822
300	8563

DN	Kv (m³/h)
350	10942
400	14489
450	18554
500	23096
600	33649
700	41732
800	53284
900	77383
1000	115000